

*Open-area Smoke Imaging Detection*





Large, open spaces – airports, train stations, stadiums and shopping malls – pose unique challenges to reliable fire detection due to their environmental nature and limitation.

## Limitations of Traditional Smoke Detection

- Susceptible to nuisance alarms
  - Dust and dirt
  - Birds and insects
  - Foreign objects
  - Fog and steam
  - Reflections
- High installation and maintenance costs
  - Difficult to align
  - Susceptible to building movement
- Affected by ambient lighting
- Inconsistent response to various smoke types

## Open-area Smoke Detection Reinvented

Open-area Smoke Imaging Detection (OSID) by Xtralis is a new technology designed specifically for these environments, enabling early detection and response to save lives and prevent service disruptions.

OSID uses a sophisticated algorithm to map and compare the strength of infrared (IR) and ultraviolet (UV) light signals from detectors configured in the space, regardless of cavernous or odd shapes.

OSID also reduces the costs of installation and maintenance as the Emitter batteries have more than a five-year life.


## Superior Features Offered by OSID

- Maximum detection range up to 150 meters (492 ft)
- Status LEDs for fire, trouble and power
- High false-alarm immunity
- Dust and intrusive solid-object rejection
- Easy alignment with large adjustment and viewing angles
- High tolerance to building flex and vibration
- Simple DIP switch configuration
- Dual wavelength LED-based smoke detection
- Limited maintenance requirements
- Conventional alarm interface for straightforward fire system integration
- Configurable alarm thresholds
- Both wired and battery-powered Emitters available

### Benefits of OSID

- **Simple and quick installation**
- **High tolerance to vibrations, building movement and high airflow**
- **Reliable discrimination between real smoke and other intruding objects such as dust, steam, birds, insects and forklifts**
- **Requires only 20 cm (8 in.) free space**
- **3-D coverage**

True spatial detection

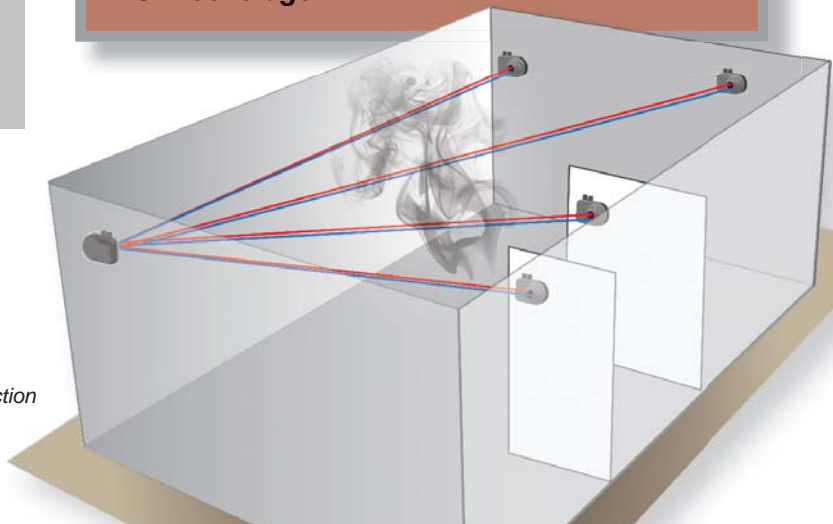



## OSID by Xtralis — Ideal for these Applications and Industries



**Shopping Malls**  
3-D arrangement may be configured to protect many large, open spaces



**Train Stations**  
Non-intrusive detection in any ambient lighting



**Suspended Ceilings**  
Discreet and flexible installation



**Concert Halls**  
Multi-layer detection



**Long Corridors**  
Beam length up to 150 m (492 ft.)



**Heritage Buildings**  
Discreet and non-intrusive detection



**Challenging Logistics**  
Simple maintenance with no disruption to operations



**Dirty Environments**  
Discriminates against dust, dirt and other intruding objects to reliably detect smoke

- Hotel and office-tower atriums
- Shopping centers and mega retail stores

- Churches and cathedrals
- Airport terminals and railway stations

- Exhibition and convention centers
- Indoor stadiums and arenas
- Industrial and manufacturing facilities

## Unique Detection Technology

OSID by Xtralis innovatively combines two technologies to reliably detect smoke in large, open spaces.

### Dual Wavelength Particle Detection

By using two wavelengths of light to detect particles, the system is able to distinguish between particle sizes. The shorter UV wavelength interacts strongly with both small and large particles, while the longer IR wavelength is affected only by larger particles. Dual wavelength path loss measurements therefore enable the detector to provide repeatable absolute smoke obscuration values, while rejecting the presence of dust particles or solid intruding objects.

### Optical Imaging with CMOS Imager Arrays

An optical imaging array in the OSID detector provides a wider viewing angle to locate and capture images. Consequently, the system is easier to install and align and can compensate for drift caused by natural shifts in building structures.

Optical filtering, high-speed image acquisition, and intelligent software algorithms also enable the OSID detector to process images and provide new levels of stability and sensitivity while providing greater immunity to high-level lighting variability.

## OSID Configurations

OSID systems may be configured to protect a range of spaces, regardless of shape. The protection zone or “fire web” is determined by the placement of OSID detectors.



Imagers		Emitters	
Field of View		Maximum Detection Range	
Horizontal	Vertical	Standard Power	High Power
7°	4°	150 m (492 ft)	-
38°	19°	60 m (197 ft)	120 m (394 ft)
80°	48°	34 m (112 ft)	68 m (223 ft)

## About Xtralis

Xtralis is the leading global provider of powerful solutions for the early detection of fire, gas and security threats. Our technologies prevent disasters by giving users time to respond before life, critical infrastructure or business continuity is compromised. We protect high-value and irreplaceable assets belonging to the world’s top governments and businesses. For more information about our life safety and security solutions, visit our Web site at [www.xtralis.com](http://www.xtralis.com).

[www.xtralis.com](http://www.xtralis.com) [www.vesda.ru](http://www.vesda.ru) **RUSSIA & CIS** +7 495 967 9339

**The Americas** +1 781 740 2223 **Asia** +852 2916 8894 **Australia and New Zealand** +61 3 9936 7000

**Continental Europe** +32 56 24 19 51 **UK and the Middle East** +44 1442 242 330

The contents of this document are provided on an “as is” basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis AG (“Xtralis”). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.